



Corporate Headquarters
4015 Casilio Parkway
Clarence, New York 14031
Ph: 716-759-2222 • Fax 716-759-6425




Canadian Division
5511 Steeles Ave West • Unit 5
North York, Ontario M9L 1S7
Ph: 416-741-0750 • Fax 416-741-0230

Garlock manufactures a wide variety of solid metal, metal clad, and metal core gaskets. Among the most requested styles are double-jacketed gaskets, Kammprofile, corrugated gaskets, solid metal gaskets, all available in a choice of metals and filler materials.

Custom configurations of heat exchanger gaskets are also available. Spiral windings can be designed with or without partitions welded to the winding, or inner and outer rings with welded partitions. Contact Garlock for all of your heat exchanger and vessel gasket needs.

Garlock Heat Exchanger Gasket Configurations

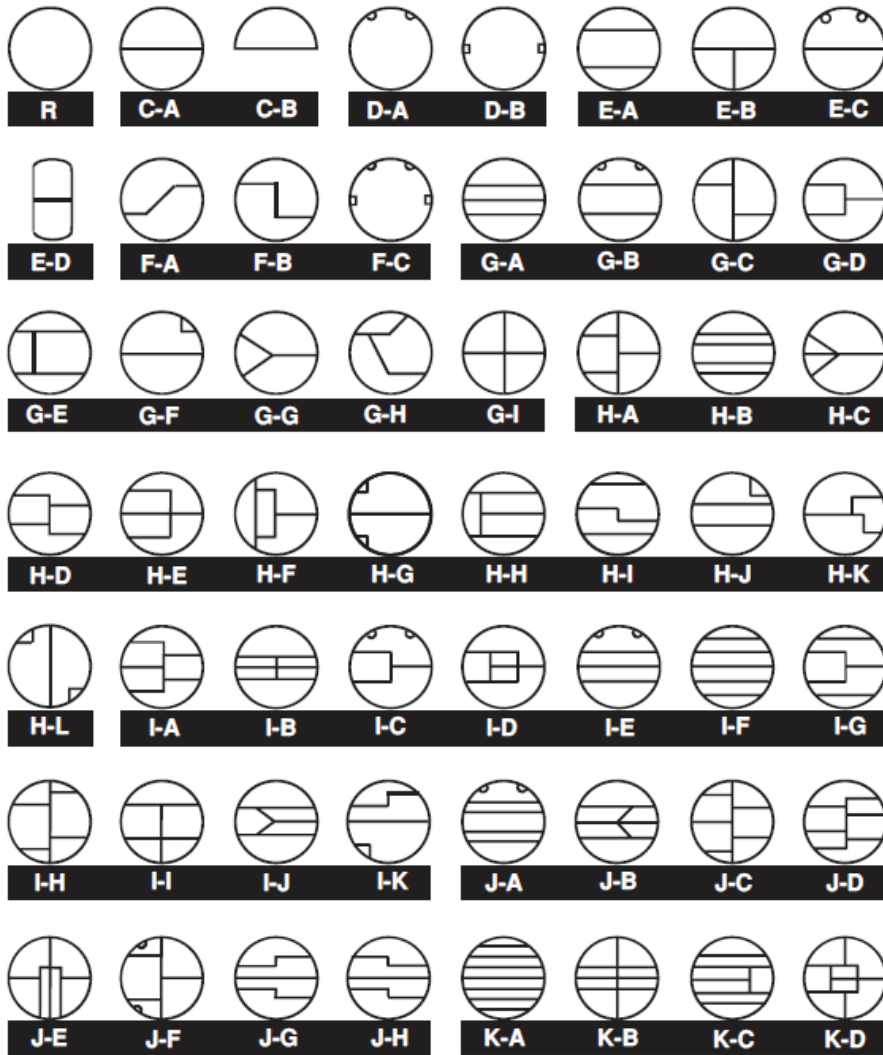

Tolerances

Gasket Outside Diameter	Inside Diameter Tolerance	Outside Diameter Tolerance
Up to 6"	+1/32" / -0	+0 / -1/32"
6" to 60"	+1/16" / -0	+0 / -1/16"
60" and above	+3/32" / -0	+0 / -3/32"

Thickness: $\pm 1/64"$
Rib Width: $\pm 1/64"$

Radii: $\pm 1/16"$
Rib Location: $\pm 1/16"$

Gasket Widths

Gasket Diameter	Minimum Width (Gasket and Ribs)	Maximum Width
Up to 12"	3/16"	*
Over 12"	1/4"	*

*Note: There is no maximum width for heat exchanger gaskets.