

## Design

Used in tandem, the Hallite 16 rod seal provides the designer with a compact low friction seal for light to medium duty hydraulic cylinders.

It has a special filled PTFE ring with a pre-loaded lip energised by an O ring. The lip is designed to have a contact area with the rod adequate to retain the media at low pressure. As high pressure acts on the O ring it compresses the lip against the rod increasing the contact area and the effectiveness of the seal.

The special PTFE ring has the low frictional properties normally associated with this material but is strengthened by additives to reduce creep. It has a low breakout friction so stick-slip is eliminated.

Standard seals are supplied with a nitrile O ring but other materials can be provided.

For the best results it is recommended two seals are fitted. The PTFE ring should always be mounted with the sealing lip on the pressure side. Sizes above 30mm are easily installed by deforming the PTFE ring into a kidney shape, sizes under 30mm are best installed using a tool, details of which can be provided.

A number of material options can be provided to extend operating conditions. Please ensure that the correct part number is specified for the material option as indicated.


**NB:** Part numbers suffixed by “‡” indicate housing sizes to meet ISO7425-2.

### Features

- Ultra low friction
- Compact housing
- Inch sizes available on request
- Seal ring component machined by Hallite, so any size can be catered for

### Material

Face Material - O Ring	
<b>Standard material</b>	
15% Glass/PTFE – NBR	--- 10
<b>Material options:</b>	
15% Glass/PTFE – FKM	--- 11
Bronze/PTFE – NBR	--- 20
Bronze/PTFE – FKM	--- 21

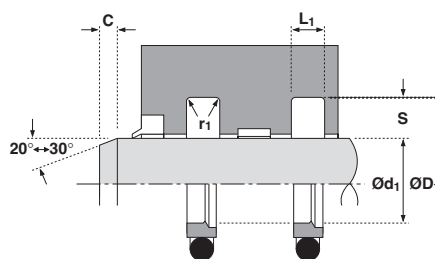

## Technical details

### Operating conditions

Maximum Speed	4.0 m/sec
Temperature Range	-30°C + 100°C
Maximum Pressure	300 bar

### Inch

12.0 ft/sec
-22°F + 212°F
4500 p.s.i.

### Maximum extrusion gap

Pressure bar	100	150	250	300
Maximum Gap mm	0.6	0.5	0.45	0.4
Pressure p.s.i.	1500	2400	3750	4500

Figures show the maximum permissible gap all on one side using minimum rod Ø and maximum clearance Ø. Refer to Housing Design section.

### Surface roughness

	µmRa	µmRt	µinCLA	µinRMS
Dynamic Sealing Face Ød <sub>1</sub>	0.1 < > 0.4	4 max	4 < > 16	5 < > 18
Static Sealing Face ØD <sub>1</sub>	1.6 max	10 max	63 max	70 max
Static Housing Faces L <sub>1</sub>	3.2 max	16 max	125 max	140 max


### Chamfers & Radii

Groove Section ≤ S mm	3.75	5.50	7.75	10.50	12.25
Min Chamfer C mm	2.0	3.0	5.0	7.5	8.0
Max Fillet Rad r <sub>1</sub> mm	0.4	0.8	1.2	1.6	1.6

### Tolerances

Ød <sub>1</sub>	ØD <sub>1</sub>	L <sub>1</sub> mm
f9	H11	+0.2 -0




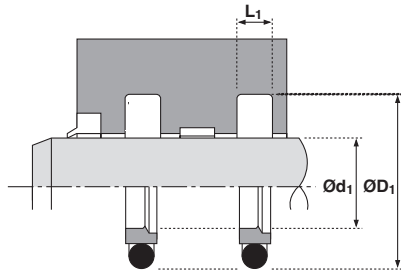

\* Split housing recommended

Ød <sub>1</sub>	TOL f <sub>9</sub>	ØD <sub>1</sub>	TOL H11	L <sub>1</sub> +0.2-0	PART No.
12	-0.016 -0.059	19.5	+0.13 +0.00	3.2	86106_ _ ‡
14	-0.016 -0.059	21.5	+0.13 +0.00	3.2	86098_ _ ‡
15	-0.016 -0.059	22.5	+0.13 +0.00	3.2	86179_ _
16	-0.016 -0.059	23.5	+0.13 +0.00	3.2	66225_ _ ‡
18	-0.016 -0.059	25.5	+0.13 +0.00	3.2	66226_ _ ‡
20	-0.020 -0.072	31.0	+0.16 +0.00	4.2	65948_ _ ‡*
22	-0.020 -0.072	33.0	+0.16 +0.00	4.2	65949_ _ ‡*
25	-0.020 -0.072	36.0	+0.16 +0.00	4.2	65950_ _ ‡*
28	-0.020 -0.072	39.0	+0.16 +0.00	4.2	66227_ _ ‡*
30	-0.020 -0.072	41.0	+0.16 +0.00	4.2	65951_ _
32	-0.025 -0.087	43.0	+0.16 +0.00	4.2	65952_ _ ‡
35	-0.025 -0.087	46.0	+0.16 +0.00	4.2	66228_ _
36	-0.025 -0.087	47.0	+0.16 +0.00	4.2	65953_ _ ‡
40	-0.025 -0.087	55.5	+0.19 +0.00	6.3	65954_ _
43	-0.025 -0.087	58.5	+0.19 +0.00	6.3	86075_ _
45	-0.025 -0.087	60.5	+0.19 +0.00	6.3	65955_ _
50	-0.025 -0.087	65.5	+0.19 +0.00	6.3	65956_ _
56	-0.030 -0.104	71.5	+0.19 +0.00	6.3	65957_ _
60	-0.030 -0.104	75.5	+0.19 +0.00	6.3	65958_ _
63	-0.030 -0.104	78.5	+0.19 +0.00	6.3	65959_ _ ‡
65	-0.030 -0.104	80.5	+0.22 +0.00	6.3	65960_ _
70	-0.030 -0.104	85.5	+0.22 +0.00	6.3	65961_ _ ‡
75	-0.030 -0.104	90.5	+0.22 +0.00	6.3	65962_ _

Ød <sub>1</sub>	TOL f <sub>9</sub>	ØD <sub>1</sub>	TOL H11	L <sub>1</sub> +0.2-0	PART No.
78	-0.030 -0.104	93.5	+0.22 +0.00	6.3	86112_ _
80	-0.030 -0.104	95.5	+0.22 +0.00	6.3	65963_ _ ‡
85	-0.036 -0.123	100.5	+0.22 +0.00	6.3	65964_ _
90	-0.036 -0.123	105.5	+0.22 +0.00	6.3	65965_ _ ‡
95	-0.036 -0.123	110.5	+0.22 +0.00	6.3	65966_ _
97	-0.036 -0.123	112.5	+0.22 +0.00	6.3	86113_ _
100	-0.036 -0.123	115.5	+0.22 +0.00	6.3	65967_ _ ‡
105	-0.036 -0.123	120.5	+0.25 +0.00	6.3	86478_ _
110	-0.036 -0.123	125.5	+0.25 +0.00	6.3	66229_ _ ‡
115	-0.036 -0.123	130.5	+0.25 +0.00	6.3	66391_ _
120	-0.036 -0.123	135.5	+0.25 +0.00	6.3	86099_ _
125	-0.043 -0.143	140.5	+0.25 +0.00	6.3	66392_ _ ‡
130	-0.043 -0.143	145.5	+0.25 +0.00	6.3	86102_ _
135	-0.043 -0.143	150.5	+0.25 +0.00	6.3	86103_ _
140	-0.043 -0.143	155.5	+0.25 +0.00	6.3	66393_ _ ‡
145	-0.043 -0.143	160.5	+0.25 +0.00	6.3	86156_ _
150	-0.043 -0.143	165.5	+0.25 +0.00	6.3	86157_ _
160	-0.043 -0.143	175.5	+0.25 +0.00	6.3	66394_ _ ‡
170	-0.043 -0.143	185.5	+0.25 +0.00	6.3	86083_ _
180	-0.043 -0.143	195.5	+0.29 +0.00	6.3	66395_ _ ‡
190	-0.050 -0.165	205.5	+0.29 +0.00	6.3	86074_ _
200	-0.050 -0.165	221.0	+0.29 +0.00	8.1	66396_ _ ‡
210	-0.050 -0.165	231.0	+0.29 +0.00	8.1	86094_ _

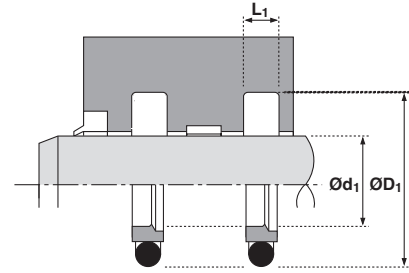

\* Split housing recommended

Ød <sub>1</sub>	TOL f9	ØD <sub>1</sub>	TOL H11	L <sub>1</sub> +0.2-0	PART No.
220	-0.050 -0.165	241.0	+0.29 +0.00	8.1	66397_ _ ‡
240	-0.050 -0.165	261.0	+0.29 +0.00	8.1	86159_ _
250	-0.050 -0.165	271.0	+0.32 +0.00	8.1	66398_ _ ‡
270	-0.056 -0.186	294.5	+0.32 +0.00	8.1	86069_ _
280	-0.056 -0.186	304.5	+0.32 +0.00	8.1	66399_ _ ‡
290	-0.056 -0.186	314.5	+0.32 +0.00	8.1	86173_ _
300	-0.056 -0.186	324.5	+0.36 +0.00	8.1	66400_ _
320	-0.062 -0.202	344.5	+0.36 +0.00	8.1	86082_ _ ‡

Ød <sub>1</sub>	TOL f9	ØD <sub>1</sub>	TOL H11	L <sub>1</sub> +0.2-0	PART No.
330	-0.062 -0.202	354.5	+0.36 +0.00	8.1	86196_ _
340	-0.062 -0.202	364.5	+0.36 +0.00	8.1	86197_ _
350	-0.062 -0.202	374.5	+0.36 +0.00	8.1	86198_ _
360	-0.062 -0.202	384.5	+0.36 +0.00	8.1	86199_ _ ‡
370	-0.062 -0.202	394.5	+0.36 +0.00	8.1	86200_ _
380	-0.062 -0.202	404.5	+0.40 +0.00	8.1	86201_ _
390	-0.062 -0.202	414.5	+0.40 +0.00	8.1	86202_ _
400	-0.062 -0.202	424.5	+0.40 +0.00	8.1	86203_ _

**Seal & Design  
Able Division**

5533 Steeles Avenue West Unit 11  
Toronto, Ontario M9L 1S7  
Ph: (416) 741-0750  
Gasket@AbleSealAndDesign.com

**Seal & Design  
Corporate Headquarters**

4015 Casilio Parkway  
Clarence, NY 14031  
Ph: (716) 759-2222  
Info@SealAndDesign.com  
www.SealAndDesign.com

**Seal & Design  
Higbee Division**

6741 Thompson Rd N  
Syracuse, NY 13221  
Ph: (315) 432-8021  
Sales@Higbee-Inc.com