

NA1001

Compressed Sheet with Aramid Fibers, NBR Binder

Application:

Style NA1001 is a very good general service gasket material that has numerous applications in the process industries and in the water and wastewater industry. It is also commonly used in equipment such as valves and pumps. Style NA1001 is suitable for service handling the following general media categories:

- Mild inorganic acids
- Diluted alkalis
- Aliphatic solvents
- Synthetic oils
- General chemicals
- Mild organic acids
- Water
- Industrial gases
- Vegetable oils
- Neutral solutions
- Refrigerants
- Brine
- Vegetable oils
- Petroleum and Derivatives
- Air

Construction:

Style NA1001 is a compressed non-asbestos sheet gasket material produced from a combination of aramid and other synthetic fibers and bonded with nitrile rubber (NBR). It is manufactured through the hot calendar process under rigorous quality control standards that are registered under ISO-9001 certification.

Availability	Size: 59 x 63 in 59 x 126 in 118 x 126 in
	Thickness: 1/64", 1/32", 1/16", 3/32", 1/8", 1/4"
Temperature	Continuous Service: 464°F (240°C)
	Maximum Service: 750°F (400°C)
Pressure	Continuous Service: 725 psi (50 bar)
	Maximum Service: 1595 psi (110 bar)
Color	Green - NA1001G
	Blue - NA1001BL
	White - NA1001W
ASTM Line Call Out F104	F712120E22M5




Typical Physical Properties:

Density	109 lb/ft ³ (1.75 g/cm ³)
Compressibility - ASTM F36	7-17%
Recovery - ASTM F36	min 45%
Tensile Strength Across Grain - ASTM F38	1670psi (11.5 N/mm ²)
Ignition Loss - ASTM F495	max 34%
Thickness Increase - ASTM F146 - after 5hr	
ASTM IRM 903 @ 300 °F (150°C)	max 12%
ASTM Fuel B @ 77 °F (25°C)	max 10%

Weight Increase - ASTM F146 - after 5hr	
ASTM IRM 903 @ 300 °F (150°C)	max 15%
ASTM Fuel B @ 77 °F (25°C)	max 15%
Creep Relaxation- ASTM F38	25%
Torque Retention (DIN 52913)	28N/mm ²
Sealability @ 1000psi - ASTM F37	max 0.25 ml/hr

Pressure x Temperature

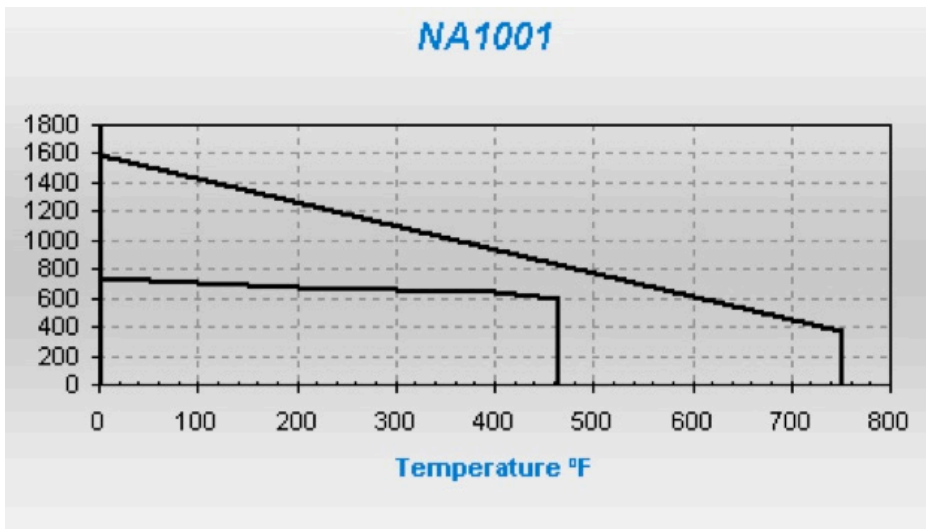

The P x T graph shown above indicates the service limits for this sheet considering pressure and temperature simultaneously... (Tests were performed with nitrogen on 1.6mm thick sheet). The "normal" curve represents the common usage area for this sheet while the "maximum" curve indicates the maximum limits. For applications near or above the "maximum" curve, contact TEADIT.



**Seal & Design
Able Division**
5533 Steeles Avenue West Unit 11
Toronto, Ontario M9L 1S7
Ph: (416) 741-0750
Gasket@AbleSealAndDesign.com



**Seal & Design
Corporate Headquarters**
4015 Casilio Parkway
Clarence, NY 14031
Ph: (716) 759-2222
Info@SealAndDesign.com
www.SealAndDesign.com



**Seal & Design
Higbee Division**
6741 Thompson Rd N
Syracuse, NY 13221
Ph: (315) 432-8021
Sales@Higbee-Inc.com