

Compressed Sheet with Controlled Swell

Construction:


Style NA1088 is a controlled swell sheet gasket material with a proprietary binder & reinforced with a synthetic/ inorganic fiber blend. It is designed for demanding applications requiring excellent sealability, torque retention, recovery, and conformability to uneven flange surfaces.

Application:

Style NA1088 is used in difficult to seal applications where inadequate bolt loading or flange surface conditions are not ideal, in low to moderate flange load conditions. The material provides a controlled swell in the presence of oils, fuels, lubricants, and water/coolant. It is used in heavy duty & industrial oil sealing applications such as diesel engine oil in Compressors, Generators, Pumps, Fuel Pumps, Gear Boxes, Cast Water Flanges, Transformers, Sight Glasses, Access Covers, Handhole/Manhole.

Availability	Size: 59 x 63 in
	Thickness: 1/16", 3/32", 1/8"
Temperature	Continuous Service: 400°F (205°C)
	Maximum Service: 650°F (343°C)*
Pressure	Continuous Service: 500 psi (34.5 bar)
	Maximum Service: 1000 psi (69 bar)*
Color	Beige/ Off White

* Consult with Teadit Engineering. Values are based on short term and peak conditions.

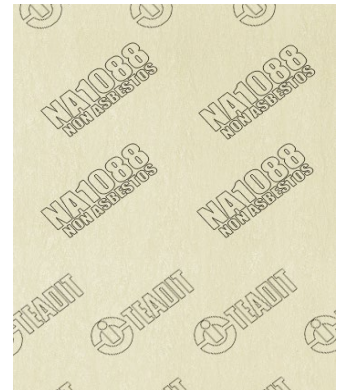

Typical Physical Properties:

Density	103 lb/ft ³ (1.65 g/cm ³)
Compressibility - ASTM F36	7-17%
Recovery - ASTM F36	min 45%
Creep Relaxation- ASTM F38	20%
Sealability @ 500psi - ASTM F37A	<0.05 ml/h
Sealability @ 3000psi - ASTM F37B	<0.05 ml/h
ASTM F146 IRM 903 - 150°C (300°F) after 5h	
Weight Increase	30-50%
Thickness Increase	30-50%
ASTM F146 Distilled Water - Room Temperature after 5h	
Weight Increase	10-35%
Thickness Increase	10-35%
ASTM F146 Distilled Water - 100°C (212°F) after 22h	
Weight Increase	10-35%
Thickness Increase	10-35%

Note: Specification values are for 0.8mm (0.031") thick sheets.



Seal & Design
Corporate Headquarters
 Ph: (716)-759-3344
 Info@SealAndDesign.com
www.SealAndDesign.com