




Back-Up Rings

Single Turn, Piston

(AS4716)

Notes:
 1. All dimensions are in inches
 2. Surfaces shall be smooth and free from irregularities. Edges shall be clear and sharp.
 3. Diameters are average and do not imply roundness.
 4. For use with standard grooves conforming to AS4716.
 5. Made of thermoplastic material. Refer to Materials section.

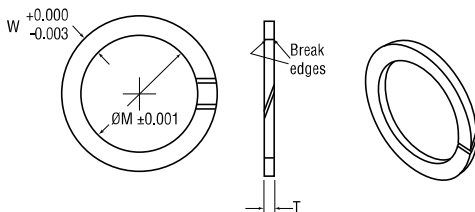

DASH NO.	ØM	O.D. REF.	W	T		
-004	0.079	0.191	0.056			
-005	0.110	0.222				
-006	0.124	0.236				
-007	0.155	0.267				
-008	0.188	0.298				
-009	0.220	0.330				
-010	0.251	0.361				
-011	0.313	0.423				
-012	0.376	0.486				
-013	0.441	0.551				
-014	0.504	0.614	0.055 0.045			
-015	0.566	0.676				
-016	0.629	0.739				
-017	0.691	0.801				
-018	0.754	0.864				
-019	0.816	0.926				
-020	0.882	0.992				
-021	0.944	1.054				
-022	1.007	1.117				
-023	1.069	1.179				
-024	1.132	1.242	0.055 0.045			
-025	1.194	1.304				
-026	1.257	1.367				
-027	1.319	1.429				
-028	1.382	1.492				
-104	0.126	0.298			0.086	0.055 0.045
-105	0.158	0.330				

DASH NO.	ØM	O.D. REF.	W	T
-106	0.189	0.361	0.086	0.055 0.045
-107	0.220	0.392		
-108	0.251	0.423		
-109	0.314	0.486		
-110	0.379	0.551		
-111	0.442	0.614		
-112	0.504	0.676		
-113	0.567	0.739		
-114	0.629	0.801		
-115	0.692	0.864		
-116	0.754	0.926	0.086	0.055 0.045
-117	0.820	0.992		
-118	0.882	1.054		
-119	0.945	1.117		
-120	1.007	1.179		
-121	1.070	1.242		
-122	1.132	1.304		
-123	1.195	1.367		
-124	1.257	1.429		
-125	1.320	1.492		
-126	1.382	1.554		
-127	1.445	1.617		
-128	1.507	1.679		
-129	1.570	1.742		
-130	1.634	1.806		
-131	1.696	1.868		
-132	1.759	1.931		

DASH NO.	ØM	O.D. REF.	W	T		
-133	1.821	1.993	0.086	0.055 0.045		
-134	1.884	2.056				
-135	1.947	2.119				
-136	2.009	2.181				
-137	2.072	2.244				
-138	2.134	2.306				
-139	2.197	2.369				
-140	2.259	2.431				
-141	2.322	2.494				
-142	2.384	2.556			0.120	0.055 0.045
-143	2.447	2.619				
-144	2.509	2.681				
-145	2.572	2.744				
-146	2.634	2.806				
-147	2.697	2.869				
-148	2.759	2.931				
-149	2.822	2.994				
-210	0.752	0.992	0.120	0.055 0.045		
-211	0.814	1.054				
-212	0.877	1.117				
-213	0.939	1.179				
-214	1.002	1.242				
-215	1.064	1.304				
-216	1.127	1.367				
-217	1.189	1.429				
-218	1.252	1.492				
-219	1.314	1.554				

