



## FLEXSEAL® HH


### FOR BOILER HANDHOLE AND TUBECAP ASSEMBLIES

- › Fits most standard boilers (specify maximum operating pressure when ordering)
- › Available in thicknesses of 0.125" (special), 0.175" (standard) and 0.250" (special-for pitted surfaces)
- › Made with the CONTROLLED DENSITY® process which ensures that the optimum filler density is constant across the windings for consistent compression and superior sealability

### ORDERING INFORMATION

When ordering, specify:

- › Make and model of boiler and/or equipment if available (See Boiler Chart)
- › Gasket style and configuration
- › Dimensions of gasket (thickness, flange seating width, and shape)
- › Maximum operating pressure and temperature
- › Type of metal and filler materials

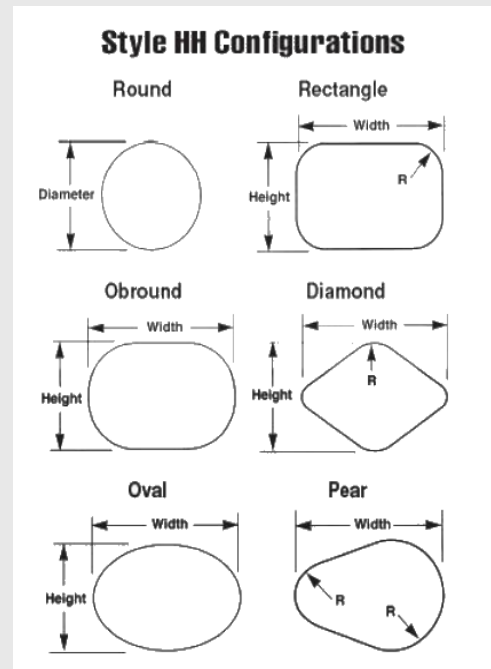

### Seal & Design Able Division

5533 Steeles Avenue West Unit 11  
Toronto, Ontario M9L 1S7  
Ph: (416) 741-0750  
Gasket@AbleSealAndDesign.com

### Seal & Design Corporate Headquarters

4015 Casilio Parkway  
Clarence, NY 14031  
Ph: (716) 759-2222  
Info@SealAndDesign.com  
[www.SealAndDesign.com](http://www.SealAndDesign.com)

### Seal & Design Higbee Division

6741 Thompson Rd N  
Syracuse, NY 13221  
Ph: (315) 432-8021  
Sales@Higbee-Inc.com