

GTB Flexible Graphite

Technical Data Sheet 436

Product Family - Single Layer Materials - Inhibited (Service to 525°C)

- GTJ - Nuclear 99.8% Graphite, D50YP12 or SHELL MESC SPE 85/203
- GTB - 98% Graphite, FSA G-604-07 Method A
- SUPER GTO™ - 97% Graphite, FSA G-604-07 Method A



Product Overview

GRAFOIL® GTB flexible graphite is inhibited against oxidation and corrosion for use in most industrial fluid sealing applications.

Applications

Most standard industrial fluid sealing applications, including:

- Chemical
- Petrochemical

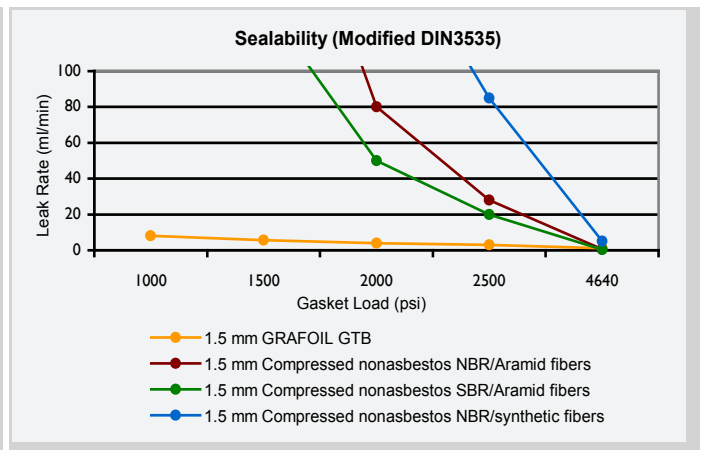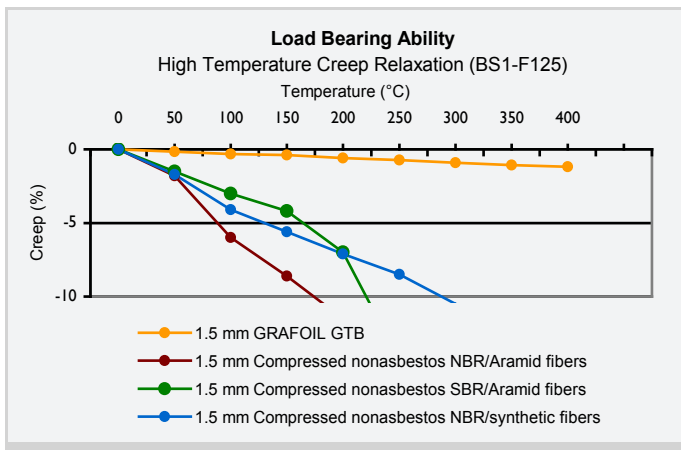

While maintaining an effective seal, GRAFOIL® material exhibits virtually no creep relaxation. As a result, the need for periodic bolt tightening is greatly reduced.

