

## Back-Up Rings


Boss Connection, Single Turn

### Boss Connection Single Turn (MS9058)

**Notes for TF58:**

1. Material: Polytetrafluoroethylene AMS 3656 / AMS 3660,
2. Edges to be cut clean and square within 5°.
3. Dimensions in inches.
4. Dash numbers of these rings correspond to the dash numbers of standard AN-6290 O-Rings.

DASH NO.	Nom. Tube O.D.	ØM	W ±0.002	T ±0.004
-02	0.125	0.246	0.122	0.056
-03	0.188	0.309	0.112	0.056
-04	0.250	0.360	0.177	0.061
-05	0.312	0.423	0.177	0.061
-06	0.375	0.478	0.121	0.061
-07	0.438	0.549	0.121	0.061
-08	0.500	0.656	0.125	0.061
-09	0.562	0.718	0.125	0.061
-10	0.625	0.769	0.131	0.073
-11	0.688	0.878	0.159	0.073
-12	0.750	0.941	0.169	0.073
-14	0.875	1.066	0.169	0.073
-16	1.000	1.191	0.169	0.073
-18	1.125	1.378	0.169	0.073
-20	1.250	1.503	0.169	0.073
-24	1.500	1.752	0.169	0.073
-28	1.750	2.127	0.169	0.073
-32	2.000	2.377	0.169	0.073

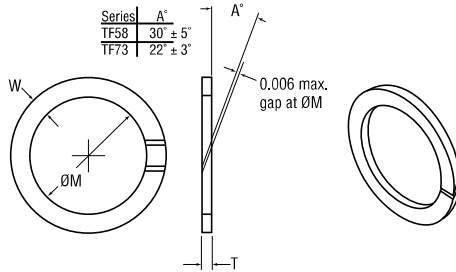

**Seal & Design  
Corporate Headquarters  
Ph: (716)-759-3344  
Info@SealAndDesign.com  
www.SealAndDesign.com**